


# Mendota FullView (FV33i & FV44i) Direct Vent Gas Fireplace Insert Specifications

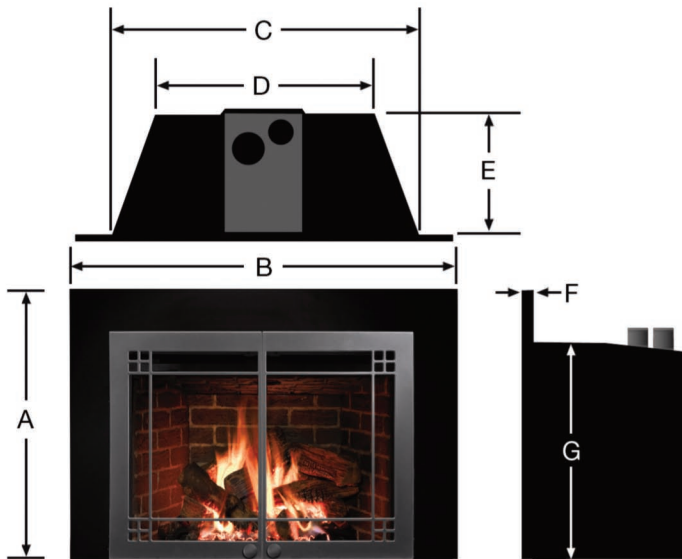

Shown with Homestead doors in Vintage Iron

## FV33i

A	24"	27"	31"
B	36"	40"	44"
C	30-5/16"		
D	22-1/4"		
E	15-3/4"		
F	1-3/4"		
G	18-7/8"		

## FV44i

A	31"	33"	36"
B	44"	48"	52"
C	34"		
D	24"		
E	16-3/8"		
F	1-3/4"		
G	23-3/4"		

## Specifications

BTUH	FV33i - Hi 33,600 Lo 14,100 FV44i - Hi 41,400 Lo 12,300
Efficiency	Up to 86.3%
Gas Supply	Natural or LP
Vent Size	3" intake, 4" exhaust
Safety System	Electronic Pilot Ignition Standing or Intermittent Pilot
Safety Tested	Intertek to CGA/AGA/ANSI Standards
Weight	FV33i - 175 lbs. FV44i - 200 lbs.

### Standard Equipment:

Log set, log rack, 2-stage ceramic burners, remote control with flame height & thermostat control, electronic pilot ignition, neo-ceram glass, FireLight accent lighting, firebrick lining.

### Options:

Mendota facings & doors; Three sizes faceplate surrounds and an arched faceplate surround; Custom sized faceplate surrounds.

Products, specifications and prices subject to change without notice. Consult our Owner's Manual for all final dimensions. Mendota products are manufactured in the U.S.A.

\*FV33i will be available Summer 2009

